

PORTABLE TANKS

DIESEL TRANSPORTATION TANK

Function: tank for re-fuelling plant and vehicles on building sites, farms and for small domestic storage, etc...

Available in “standard” and “digital” versions (with digital litre counter and available with 230V power supply).


Technical characteristics: made of rotomoulded linear polyethylene, type-approved, fully ADR exempt.

Equipment: hinged cap; connections for anchor belts; lifting handles; fork lift pick-up points; flexible delivery pipe (5mt); dispensing nozzle; fill cap with valve; electrical cable with terminals; pump; digital flow meter (in the “digital” version only).



Item	Version	Volume l	Dimensions L x w x h mm	Empty weight kg	Supply pump Volt	Flow rate l/min	Price €
GSL210B	Standard	210	800x600x700	35	12-24	40	1280.00
GSL210DG	Digital	210	800x600x700	35	12-24	40	1480.00
GSL440B	Standard	440	1200x700x800	55	12-24	40	1670.00
GSL440DG	Digital	440	1200x700x800	55	12-24	40	1870.00

1. FLEXIBLE DELIVERY PIPE (5M)
2. DISPENSING NOZZLE
3. FILL CAP with dual pressure relief valve mounted on a stainless steel insert
4. ELECTRICAL CABLE WITH TERMINALS
5. 12/24 VOLT PUMP
6. DIGITAL FLOW METER (in the “Digital” version only)

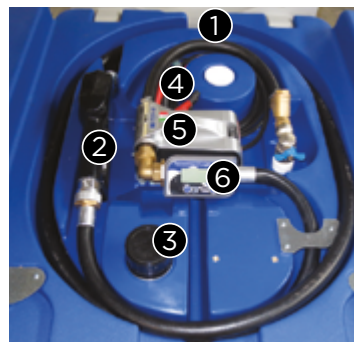



ADR EXEMPT PORTABLE DIESEL TANKS

Function: ADR exempt tank for the road transport of flammable liquids such as diesel.

Standard equipment: manufactured in selected S235JR carbon steel according to EN10025/93, thickness 30/10, protected against impact and overturning by a protective frame. Top inspection hatch, diameter 200 mm, complete with bolts and gaskets: lockable 3" quick connection; baffles to prevent fluid movement. The unit has a type-approved dual-action safety valve to prevent leaks in the case of overturning and a rupture disc in case of fire. An external dial type level indicator is mounted on the upper part.

Technical characteristics: Green RAL6018 tank complete with battery driven 12/24 volt pump of capacity 22 to 48 litres/min mounted in an orange RAL2008 steel cabinet with lock and key, meter for private use, a line filter and a 1" oil resistant rubber hose with automatic nozzle. Lifting points are provided on all four sides.


Accessories available on request:

Filter for use with flows up to 70 l/min

External level indicator

220 V pump

Note: not for aviation fuel

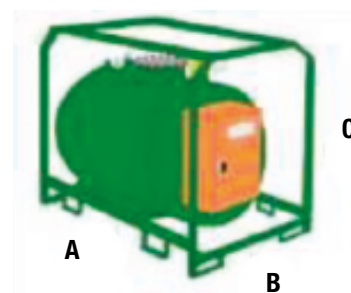

Item	Capacity w	A mm	B mm	C mm	Weight kg	Price €
GSL300ESE	296	1150	770	1010	148	3470.00
GSL400ESE	405	1150	770	1260	162	3760.00

ADR EXEMPT PORTABLE DIESEL TANKS

Function: ADR exempt tank for the road transport of fuel as described in section 1.1.3.1 C of the ADR standard

Standard equipment: manufactured in painted 30/10 carbon steel, complete with compressed air operated lockable lid, refill nozzle, level indicator, mesh filter, automatic nozzle. The tank has 600 litres of space for storing any type of work equipment.



Technical characteristics: The tank is fed by a 12V or 24V pump of capacity 40 l/min, 4 m of fuel hose, automatic nozzle, 2 m long electric cable and terminals for connecting to a battery. Fuel level indicator, Y filter mounted after the dip tube.

Accessories available on request:

Digital litre counter.

Absorption filter for condensate and impurities

Note: not for aviation fuel

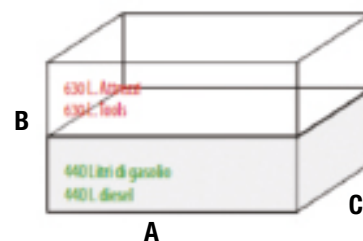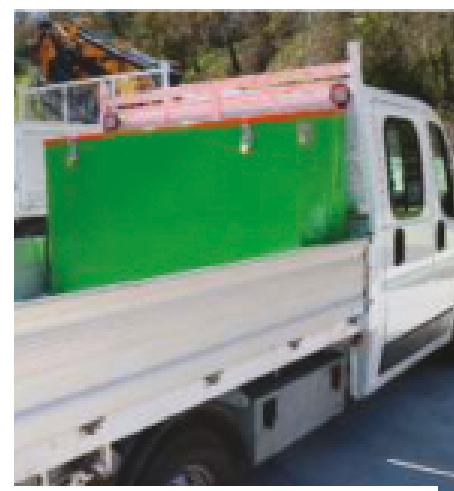

Item	A mm	B mm	C mm	Weight kg	Price €
DBT600ESE	1800	1080	550	180	5950,00



ADR EXEMPT PAINTED ALUMINIUM PORTABLE TANKS

Function: ADR exempt tank for the road transport of fuel as described in section 1.1.3.1 C of the ADR standard.

Standard equipment: Manufactured in painted 30/10 carbon steel, complete with compressed air operated lockable lid, refill nozzle, level indicator, mesh filter, automatic nozzle, hook for lifting with a fork lift while full.

Technical characteristics: The shape of the tank has been specifically designed for installation on a pickup truck. It is fed by a 12V or 24V pump of capacity 40 l/min, 4 m of fuel hose, automatic nozzle, 2 m long electric cable and terminals for connecting to a battery. Fuel level indicator, Y filter mounted after the dip tube and before the pump intake.

Accessories available on request:


Digital litre counter.

Absorption filter for condensate and impurities.

Note: not for aviation fuel



Item	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg	Capacity w	Price €
DB440ESE	165	65	35	58	16	30	96	60	100	440	3100.00

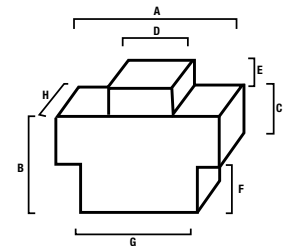

ADR EXEMPT PORTABLE ALUMINIUM TANKS


Function: ADR exempt portable aluminium tank to transport diesel.

Standard equipment: Rectangular tank in aluminium designed to be carried on a pick-up or a small flat-bed truck. Suitable for liquids of class and packing group III (diesel). The absence of a support frame improves visibility for the driver. Capacity from 80 up to 440 litres. The 4 mm aluminium plate thickness provides greater strength against impacts.

Technical characteristics: Provided with a 320 mm diameter padlockable inspection hatch and decompression valve. Equipped with a 12-24V pump located inside the inspection hatch, hose length 4m, automatic filler nozzle.

Accessories available on request: Digital litre counter

Note: not for aviation fuel

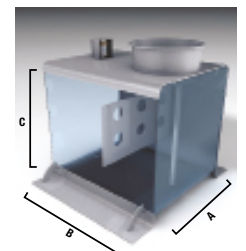

Item	Capacity w	A mm	B mm	C mm	Weight kg	Price €
GSL80ESE	80	500	500	570	17	2520.00
GSL250ESE	250	795	750	770	37	3100.00
GSL333ESE	333	795	1000	770	48	3380.00
GSL440ESE	440	795	1360	770	61	3760.00



ADR COMPLIANT PORTABLE DIESEL TANKS

Function: ADR compliant portable Diesel tank.

Standard equipment: Manufactured in selected S235JR carbon steel according to EN10025/93, thickness 30/10. Provided with a structure that protects against impact and overturning, an inspection hatch of diameter 300 mm, complete with bolts and gaskets, lockable 3" quick connection, baffles to prevent fluid movement. The unit also has a type-approved dual-action safety valve to prevent fluid leaks in the case of overturning and a rupture disc. The lower part houses an external level indicator.

Technical characteristics: Green RAL6018 tank complete with: n°1 battery driven 12/24 volt pump with a flow rate of up to 45 litres/min, mounted in an orange RAL2008 steel cabinet with lock and key; n°1 meter for private use; n°1 line filter and n°1 x 1" oil resistant rubber hose with automatic nozzle. Lifting points are provided on all four sides.

Accessories available on request:


Digital litre counter

Absorption filter for condensate and impurities.

Note: not for aviation fuel



Item	Capacity w	A mm	B mm	C mm	Weight kg	Price €
GSL300ADR	296	1150	770	1010	148	3650.00
GSL400ADR	405	1150	770	1260	162	3930.00
GSL600ADR	605	1300	970	1210	237	4190.00
GSL1000ADR	1000	1810	1035	1325	310	4460,00

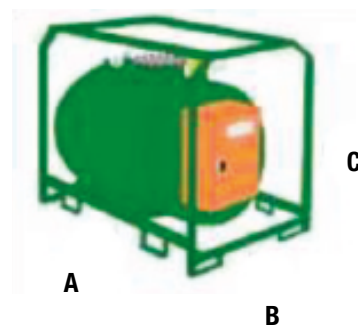



ADR COMPLIANT PORTABLE PETROL AND DIESEL TANKS

Function: For the transport of petrol, diesel, class 3 liquids and packing groups II-III. Designed for refuelling boats, construction machinery, grass cutters, tractors, combine harvesters, etc...

Standard equipment: Rectangular tank in aluminium designed to be carried on a pick-up or a small flat-bed truck. Capacity of from 80 up to 333 litres. Thickness 4 mm.

Technical characteristics: Provided with a 320 mm diameter padlockable inspection hatch, 0.3 bar vapour decompression valve to ADR standards, constructed entirely in aluminium with VITON or PTFE gasket, ergonomic lifting eyes. Equipped with a 12-24V pump, hose length 4m, automatic filler nozzle

Accessories available on request:

Digital litre counter

Note: not for aviation fuel



Item	Capacity w	A mm	B mm	C mm	Weight kg	Price €
GB80ADR	80	500	570	500	17	2890.00
GB250ADR	250	795	770	750	37	3330.00
GB333ADR	333	795	770	1000	48	3650.00
BNZ80ADR	80	500	570	500	37	4250.00
BNZ250ADR	250	795	770	750	37	5100.00
BNZ333ADR	333	795	770	1000	48	5400.00

